



i3PROJECTOR L3502Wi

INTERACTIVE LASER PROJECTOR

i3PROJECTOR L3502Wi Plus is an ultra short-throw projector without lamp! The next generation projector offers numerous performance capabilities and lowers the total cost of ownership dramatically. i3PROJECTOR Wi Plus is user-friendly and has advanced features for flexible presenting.

Connecting the L3502Wi to a computer, users can operate computer software with the two interactive pens in the same way as a mouse, and can also digitally annotate the projection without the need for an additional interactive whiteboard. The dual pen operation enables collaborative learning and helps to boost meeting creativity.

As it is mounted to the wall above the projection surface, i3PROJECTOR completely eliminates shadows.

Offering a brightness of 3500 lm and a light source lifetime of 20,000 hours, this projector is the ideal projection solution for classrooms and meeting rooms.

INTERACTIVE

- Interactive Technology: infrared digital stylus
- Multi-pen: one or two stylus (depending on operating system)
- Interactive Area: 80" to 110" diagonal

INSPIRING

- Laser technology
- Lamp life 20,000hrs
- Ultra short-throw projector
- Instant On / Off (5sec)
- Green design: Mercury free
- Wide color range

INTEGRATED



- 3500 Lumen
- WXGA 1280x800
- Aspect ratio 16:10
- Speaker 10W
- DLP Technology

WARRANTY

- 3 years on the projector
- 3 years (max. 10,000 hours) on the light source *

*extendable to 5 years




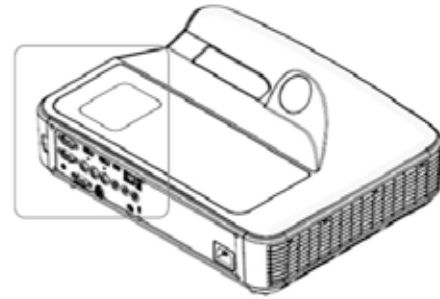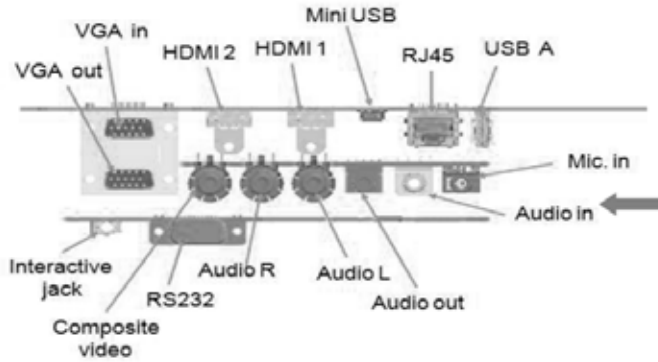

SPECIFICATIONS

Laser light source LASER with 20,000hrs lifetime	
Brightness	3500 lumens
Contrast	1,800:1 (native) / 10,000:1 (APM)
Resolution (native)	1280 x 800
Aspect ratio (native)	16 : 10
Throw ratio	0.27
Focus range	85" - 110"
Temperature/ Humidity	Operating : 5°C ~ 40°C / 5%~90% without condensation Storage : 0°C ~60°C / 5%~95% without condensation Shipping :- 20°C ~ 60°C / 5%~95% without condensation
Temperature / Altitude	Operation 5°C~40°C @ 0~2,500 feet 5°C~35°C @ 5°C~30°C @ 5,000~10,000 feet
Thermal Protection	Auto shutdown : Ambient temperature exceeds 47±2°C Auto ECO : Ambient temperature exceeds 40°C
Noise level	Full mode : 36dBA (typical) / 38dBA (maximum) ECO mode : 32dBA (typical) / 35dBA (maximum)
HDMI input	Qty : 2 (HDMI1 with MHL2.0 support) HDMI : 1.3a HDCP : 1.3 Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)
VGA input	Qty : 2 (1 sharing with VGA output by OSD setup) Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)
Composite input	Qty : 1 / RCA (yellow) Video Standard : 480i/576i
VGA output	Qty : 1 (Sharing with one of VGA input by OSD setup) Loop through VGA input

VGA audio input	Qty : 1 / 3.5mm phone jack (blue) / stereo (dedicated to selected VGA input port)
Composite audio input Qty	2 / RCA-Left (white) / RCA-Right (red) / stereo
Microphone input Qty	1 / 3.5mm phone jack (pink) / mono
System audio output Qty	1 / 3.5mm phone jack (green) / stereo
RS232	Qty : 1 / DB-9 female / 9600bps Purpose : projector control
Mini USB	Qty : 1 / device mode Purpose : for firmware upgrade (USB1.0) / interactive (USB2.0)
RJ45	Qty : 1 / Fast Ethernet (100Base-T) Purpose : remotely projector control (Crestron / AMX / PJ-Link)
USB A	Qty : 1 / host mode / USB2.0 (for local playback or Wi-Fi dongle)
Speaker	1 x 10W
Power consumption	291W (Full mode), 198W (Eco mode)
Standby power	(1) Idle without LAN wakeup : < 0.5W (2) Idle with LAN wakeup : < 8W
Dimensions	Width x Depth x Height = 383mm x 308mm x 86mm
Weight Net	5.5kg (12.1lb)
EMC	CE, FCC, CCC
Safety	TUV, UL, CCC
Green	RoHS, WEEE, REACH
Accessories	AC power cord 3m x1 VGA cable 1.8m x1 USB cable 1.8m x1 Wall mount x1 Active pen x2 Remote control x1 User Manual

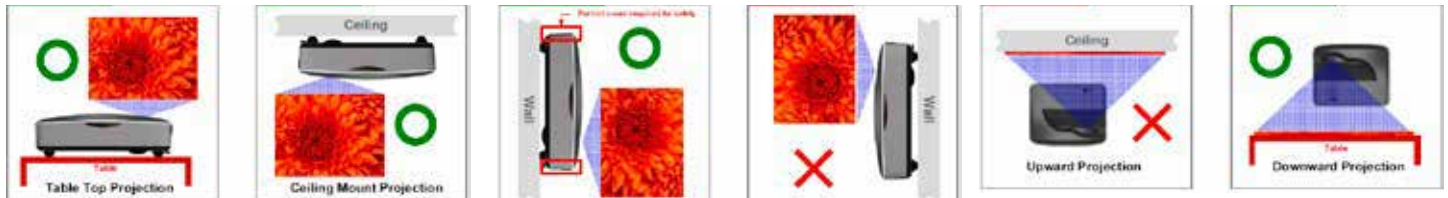

AUTHORISED DISTRIBUTOR